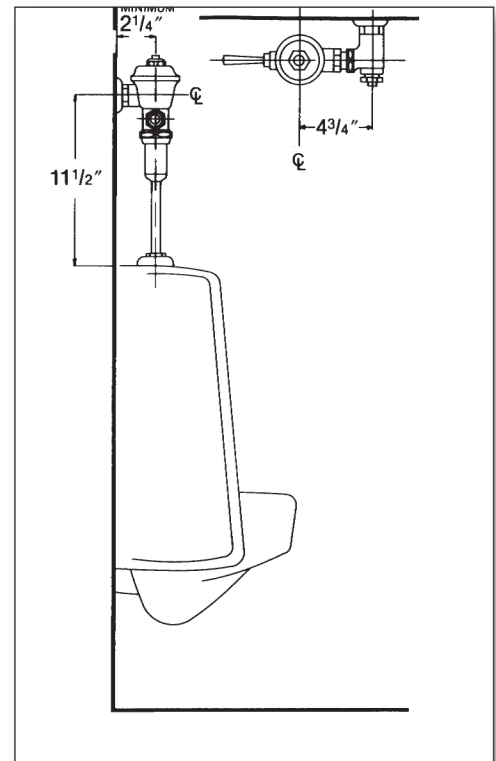


**U451-1****FLUSHBOY ULTRA***LOW CONSUMPTION FLUSH VALVE  
( 1.0gpf / 3.8Lpf Per Flush )*

**P**olished chrome plated flush valve, chloramine resistant diaphragm, 1.0 gallons per flush, externally adjustable, with 3/4" vandle resistant capped screwdriver angle stop with back-check, renewable main valve seat, ADA compliant metal "Rubberflex" oscillating handle, with KwikFit ground joint tailpiece, vacuum breaker, wall flange, spud nut and spud flange for 3/4" top spud.

**Variations**

- ☐ SC – SlipFit connection (adjustable joint tailpiece)
- ☐ AM – Antimicrobial Coated Handle
- ☐ SH – SmartHandle Dual-Flush with Antimicrobial Coating
- ☐ T5 – Non-Hold-Open Feature
- ☐ T6 – Wall flange with allen set screw
- ☐ T36 – Solid ring wall support for flush connection
- ☐ T42 – Sweat adapter kit for stop
- ☐ T46 – Split ring wall support for flush connection
- ☐ T106– Mashaerator Self-Cleaning Bypass

**Remarks**

P.O. Box 411 • Charlottesville • VA • 22902 • USA  
Phone: (434) 296-0166 • Fax (434) 977-3596  
Email: [info@delanyproducts.com](mailto:info@delanyproducts.com)  
Web: [www.delanyproducts.com](http://www.delanyproducts.com)  
©2014

